

T4 Odyssey Ultra Slim Series

High Performance Linkable Fluorescent Fixtures

Project Name: _____

Catalog No.: _____

Date: _____

Features



- High-performance energy-efficient built-in electronic ballast
- Fixture-to-fixture linking via link cords or modular connectors
- Plug-and-play installation
- Linkable for continuous lighting (300W Max)
- Low energy consumption, high lumen output (520 lm @ 8 Watts)
- Low profile: 7/8" W x 1 5/8" H
- Optional hard wiring cables and junction box
- High color rendering index (CRI) of 82
- 6 different Lengths from 13 1/2" - 46 1/4"
- Lamps available in 5 white color temperatures
- Lamps available in red, green, blue, and blacklight blue



Product Specifications

Housing	Satin Anodized Extruded Aluminum Frame
Ballast	Built-in A.E. Electronic Ballast
Lens Cover	Poly-Vinyl Carbonate Diffuser
Lamp	T4 Tri-Phosphor Bi-Pin Lamp
Color Temperatures	2700K Warm White 3000K Natural White 3500K Neutral White 4100K Cool White 6400K Day Light
Available Lamp Colors	Red, Blue, Green, Blacklight Blue
Lumens	See Information Chart
Power Requirement	120V AC
Ground	3-Prong Grounded Wire System
Min. Operating Temp	5° F / -15° C
Max Continuous Link	300 Watts from a single power source
Certification	ETL Listed (U.S. and Canada)
Warranty	2 Years (Excludes Lamp)

Dimensions

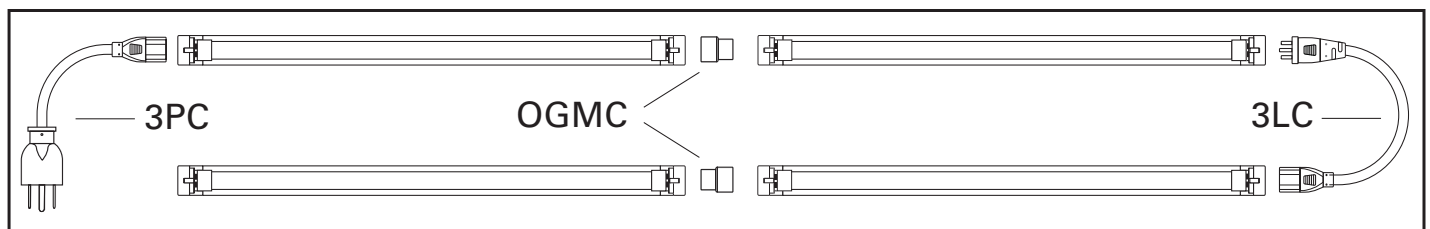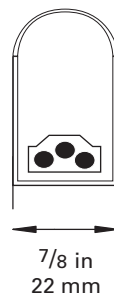

All design and specifications are subject to change without notice.

Cat. No.	Voltage	Input Amp	Watt	Length	Width	Height	Lamp Color	Lumens (lm)
OT413LC/27K	120V AC	.12	8	13 1/2"	7/8"	15/8"	2700K	520
OT413LC/30K	120V AC	.12	8	13 1/2"	7/8"	15/8"	3000K	520
OT413LC/35K	120V AC	.12	8	13 1/2"	7/8"	15/8"	3500K	520
OT413LC/41K	120V AC	.12	8	13 1/2"	7/8"	15/8"	4100K	520
OT413LC/64K	120V AC	.12	8	13 1/2"	7/8"	15/8"	6400K	520
OT413LC/RED	120V AC	.12	8	13 1/2"	7/8"	15/8"	Red	520
OT413LC/BLU	120V AC	.12	8	13 1/2"	7/8"	15/8"	Blue	520
OT413LC/GRN	120V AC	.12	8	13 1/2"	7/8"	15/8"	Green	520
OT413LC/BLK	120V AC	.12	8	13 1/2"	7/8"	15/8"	Blacklight Blue	520
OT417LC/27K	120V AC	.19	12	17 1/2"	7/8"	15/8"	2700K	780
OT417LC/30K	120V AC	.19	12	17 1/2"	7/8"	15/8"	3000K	780
OT417LC/35K	120V AC	.19	12	17 1/2"	7/8"	15/8"	3500K	780
OT417LC/41K	120V AC	.19	12	17 1/2"	7/8"	15/8"	4100K	780
OT417LC/64K	120V AC	.19	12	17 1/2"	7/8"	15/8"	6400K	780
OT417LC/RED	120V AC	.19	12	17 1/2"	7/8"	15/8"	Red	780
OT417LC/BLU	120V AC	.19	12	17 1/2"	7/8"	15/8"	Blue	780
OT417LC/GRN	120V AC	.19	12	17 1/2"	7/8"	15/8"	Green	780
OT417LC/BLK	120V AC	.19	12	17 1/2"	7/8"	15/8"	Blacklight Blue	780
OT421LC/27K	120V AC	.25	20	21"	7/8"	15/8"	2700K	1350
OT421LC/30K	120V AC	.25	20	21"	7/8"	15/8"	3000K	1350
OT421LC/35K	120V AC	.25	20	21"	7/8"	15/8"	3500K	1350
OT421LC/41K	120V AC	.25	20	21"	7/8"	15/8"	4100K	1350
OT421LC/64K	120V AC	.25	20	21"	7/8"	15/8"	6400K	1350
OT421LC/RED	120V AC	.25	20	21"	7/8"	15/8"	Red	1350
OT421LC/BLU	120V AC	.25	20	21"	7/8"	15/8"	Blue	1350
OT421LC/GRN	120V AC	.25	20	21"	7/8"	15/8"	Green	1350
OT421LC/BLK	120V AC	.25	20	21"	7/8"	15/8"	Blacklight Blue	1350
OT429LC/27K	120V AC	.35	22	29"	7/8"	15/8"	2700K	1700
OT429LC/30K	120V AC	.35	22	29"	7/8"	15/8"	3000K	1700
OT429LC/35K	120V AC	.35	22	29"	7/8"	15/8"	3500K	1700
OT429LC/41K	120V AC	.35	22	29"	7/8"	15/8"	4100K	1700
OT429LC/64K	120V AC	.35	22	29"	7/8"	15/8"	6400K	1700
OT429LC/RED	120V AC	.35	22	29"	7/8"	15/8"	Red	1700
OT429LC/BLU	120V AC	.35	22	29"	7/8"	15/8"	Blue	1700
OT429LC/GRN	120V AC	.35	22	29"	7/8"	15/8"	Green	1700
OT429LC/BLK	120V AC	.35	22	29"	7/8"	15/8"	Blacklight Blue	1700
OT440LC/27K	120V AC	.40	26	40 1/4"	7/8"	15/8"	2700K	2400
OT440LC/30K	120V AC	.40	26	40 1/4"	7/8"	15/8"	3000K	2400
OT440LC/35K	120V AC	.40	26	40 1/4"	7/8"	15/8"	3500K	2400
OT440LC/41K	120V AC	.40	26	40 1/4"	7/8"	15/8"	4100K	2400
OT440LC/64K	120V AC	.40	26	40 1/4"	7/8"	15/8"	6400K	2400
OT440LC/RED	120V AC	.40	26	40 1/4"	7/8"	15/8"	Red	2400
OT440LC/BLU	120V AC	.40	26	40 1/4"	7/8"	15/8"	Blue	2400
OT440LC/GRN	120V AC	.40	26	40 1/4"	7/8"	15/8"	Green	2400
OT440LC/BLK	120V AC	.40	26	40 1/4"	7/8"	15/8"	Blacklight Blue	2400
OT446LC/27K	120V AC	.42	28	46 1/4"	7/8"	15/8"	2700K	2900
OT446LC/30K	120V AC	.42	28	46 1/4"	7/8"	15/8"	3000K	2900
OT446LC/35K	120V AC	.42	28	46 1/4"	7/8"	15/8"	3500K	2900
OT446LC/41K	120V AC	.42	28	46 1/4"	7/8"	15/8"	4100K	2900
OT446LC/64K	120V AC	.42	28	46 1/4"	7/8"	15/8"	6400K	2900
OT446LC/RED	120V AC	.42	28	46 1/4"	7/8"	15/8"	Red	2900
OT446LC/BLU	120V AC	.42	28	46 1/4"	7/8"	15/8"	Blue	2900
OT446LC/GRN	120V AC	.42	28	46 1/4"	7/8"	15/8"	Green	2900
OT446LC/BLK	120V AC	.42	28	46 1/4"	7/8"	15/8"	Blacklight Blue	2900

Each Odyssey fixture includes T4 Lamp, Lens Cover, Modular Connector (OGMC), and 2 Mounting Brackets w/ Screws (MBS).

Lumen output is based upon 4100K cool white lamps.

Link Odyssey fixtures together utilizing modular connectors (OGMC Included) or link cords (3LC sold separately).

WARNING: Maximum link wattage for Odyssey fixtures is not to exceed **300W** from one power source.

Cat. No.	Matching Fixture	Watt	Life (Hrs)	Color	Lumens†	CRI	Length	Box Qty.
F8T4/827	OT413LC	8	15,000	2700K	520	82	13"	6
F8T4/830	OT413LC	8	15,000	3000K	520	82	13"	6
F8T4/835	OT413LC	8	15,000	3500K	520	82	13"	6
F8T4/841	OT413LC	8	15,000	4100K	520	82	13"	6
F8T4/864	OT413LC	8	15,000	6400K	520	82	13"	6
F8T4/RED	OT413LC	8	15,000	Red	520	82	13"	6
F8T4/BLU	OT413LC	8	15,000	Blue	520	82	13"	6
F8T4/GRN	OT413LC	8	15,000	Green	520	82	13"	6
F8T4/BLK	OT413LC	8	15,000	Blacklight Blue	520	82	13"	6
F12T4/827	OT417LC	12	15,000	2700K	780	82	17"	6
F12T4/830	OT417LC	12	15,000	3000K	780	82	17"	6
F12T4/835	OT417LC	12	15,000	3500K	780	82	17"	6
F12T4/841	OT417LC	12	15,000	4100K	780	82	17"	6
F12T4/864	OT417LC	12	15,000	6400K	780	82	17"	6
F12T4/RED	OT417LC	12	15,000	Red	780	82	17"	6
F12T4/BLU	OT417LC	12	15,000	Blue	780	82	17"	6
F12T4/GRN	OT417LC	12	15,000	Green	780	82	17"	6
F12T4/BLK	OT417LC	12	15,000	Blacklight Blue	780	82	17"	6
F20T4/827	OT421LC	20	15,000	2700K	1350	82	20 1/2"	6
F20T4/830	OT421LC	20	15,000	3000K	1350	82	20 1/2"	6
F20T4/835	OT421LC	20	15,000	3500K	1350	82	20 1/2"	6
F20T4/841	OT421LC	20	15,000	4100K	1350	82	20 1/2"	6
F20T4/864	OT421LC	20	15,000	6400K	1350	82	20 1/2"	6
F20T4/RED	OT421LC	20	15,000	Red	1350	82	20 1/2"	6
F20T4/BLU	OT421LC	20	15,000	Blue	1350	82	20 1/2"	6
F20T4/GRN	OT421LC	20	15,000	Green	1350	82	20 1/2"	6
F20T4/BLK	OT421LC	20	15,000	Blacklight Blue	1350	82	20 1/2"	6
F22T4/827	OT429LC	22	15,000	2700K	1700	82	28 1/2"	6
F22T4/830	OT429LC	22	15,000	3000K	1700	82	28 1/2"	6
F22T4/835	OT429LC	22	15,000	3500K	1700	82	28 1/2"	6
F22T4/841	OT429LC	22	15,000	4100K	1700	82	28 1/2"	6
F22T4/864	OT429LC	22	15,000	6400K	1700	82	28 1/2"	6
F22T4/RED	OT429LC	22	15,000	Red	1700	82	28 1/2"	6
F22T4/BLU	OT429LC	22	15,000	Blue	1700	82	28 1/2"	6
F22T4/GRN	OT429LC	22	15,000	Green	1700	82	28 1/2"	6
F22T4/BLK	OT429LC	22	15,000	Blacklight Blue	1700	82	28 1/2"	6
F26T4/827	OT440LC	26	15,000	2700K	2400	82	39 3/4"	6
F26T4/830	OT440LC	26	15,000	3000K	2400	82	39 3/4"	6
F26T4/835	OT440LC	26	15,000	3500K	2400	82	39 3/4"	6
F26T4/841	OT440LC	26	15,000	4100K	2400	82	39 3/4"	6
F26T4/864	OT440LC	26	15,000	6400K	2400	82	39 3/4"	6
F26T4/RED	OT440LC	26	15,000	Red	2400	82	39 3/4"	6
F26T4/BLU	OT440LC	26	15,000	Blue	2400	82	39 3/4"	6
F26T4/GRN	OT440LC	26	15,000	Green	2400	82	39 3/4"	6
F26T4/BLK	OT440LC	26	15,000	Blacklight Blue	2400	82	39 3/4"	6
F28T4/827	OT446LC	28	15,000	2700K	2900	82	45 3/4"	6
F28T4/830	OT446LC	28	15,000	3000K	2900	82	45 3/4"	6
F28T4/835	OT446LC	28	15,000	3500K	2900	82	45 3/4"	6
F28T4/841	OT446LC	28	15,000	4100K	2900	82	45 3/4"	6
F28T4/864	OT446LC	28	15,000	6400K	2900	82	45 3/4"	6
F28T4/RED	OT446LC	28	15,000	Red	2900	82	45 3/4"	6
F28T4/BLU	OT446LC	28	15,000	Blue	2900	82	45 3/4"	6
F28T4/GRN	OT446LC	28	15,000	Green	2900	82	45 3/4"	6
F28T4/BLK	OT446LC	28	15,000	Blacklight Blue	2900	82	45 3/4"	6

† Lumens are based upon a 4100K color temperature.

Lamps available in box quantities of 6 only.

All lamps MUST be ordered in box quantities of 6 to prevent damage during transit.

T4 Odyssey Ultra Slim Series

High Performance Linkable Fluorescent Fixtures

Ordering Information (Accessories)


Link Cords

3LC02	2" Inch Link Cord White
3LC06	6" Inch Link Cord White
3LC12	12" Inch Link Cord White
3LC24	24" Inch Link Cord White
3LC36	36" Inch Link Cord White
3LC72	72" Inch Link Cord White
3LC02BLK	2" Inch Link Cord Black
3LC06BLK	6" Inch Link Cord Black
3LC12BLK	12" Inch Link Cord Black
3LC24BLK	24" Inch Link Cord Black
3LC36BLK	36" Inch Link Cord Black
3LC72BLK	72" Inch Link Cord Black
3LC06R	6" Inch Link Cord Right Angle White
3LC12R	12" Inch Link Cord Right Angle White
3LC24R	24" Inch Link Cord Right Angle White
3LC36R	36" Inch Link Cord Right Angle White
3LC72R	72" Inch Link Cord Right Angle White




Power Cords

3PC3	3' Foot Power Cord White
3PC6	6' Foot Power Cord White
3PC12	12' Foot Power Cord White
3PC6R	6' Foot Power Cord White Right Angle
3PC12R	12' Foot Power Cord White Right Angle
3PC6SW	6' Foot Power Cord w/ Switch White
3PC12SW	12' Foot Power Cord w/ Switch White
3PT18	18" Inch Hard-wire Pigtail White
3PT36	36" Inch Hard-wire Pigtail White
3PC3BLK	3' Foot Power Cord Black
3PC6BLK	6' Foot Power Cord Black
3PC12BLK	12' Foot Power Cord Black
3PC6SWBLK	6' Foot Power Cord w/ Switch Black




Miscellaneous

JBSC	Junction Box (2.25" x 4" x 1.4" - W x L x H)
MBS	2 Mounting Brackets w/ Screws (included with fixture)
OGMC	Modular Connector (included with fixture)
OGSW1	Modular On/Off Rocker Switch




JBSC



MBS
Included
w/Fixture



OGMC
Included
w/Fixture



OGSW1