

# Galaxy Ultra Slim Series

High Performance Dimmable LED Fixtures

Project Name: \_\_\_\_\_

Catalog No.: \_\_\_\_\_

Date: \_\_\_\_\_

## Features

- Swivel lamp 50° from center to left or right
- Fully dimmable from 0 - 100% via triac dimmer
- Link-able for continuous lighting (450 W max.)
- High lumen output
- Energy efficient (650 lm/ft @ 8 watts)
- 50,000 hrs maintenance free
- Low profile 7/8" W x 1 5/8" H
- Seven standard lengths from 9 1/8" - 45"
- Easy installation (plug and play)




## Product Specifications


Power Requirement	120VAC @ 50/60hz 240V & 277V Optional
THD	< 10% @ 120V/ 15% @ 277V
Power Factor	0.99
Driver type	Isolated
Operating Temperature	-22°F - 113°F/ -30°C - 45°C
Color temperature	3000K, 4000K, 5000K/ ±200K
Color Rendering Index	≥ 80 (CRI)
Environment Rating	Dry, Damp location
Connections	3-prong grounded wire system
Housing	Extruded aluminum housing
Lens cover	Polycarbonate (PC) frosted optical type
UL Certification	UL1598 Luminaire/ UL153 Under Cabinet

## Applications

- Display Cases & Cabinets
- Retail Environments
- Cove & Soffit Lighting
- Shelf Lighting
- Trade Show Exhibits
- Lightboxes
- Signs
- Edge Lighting
- Residential Closets, Kitchens, Baths

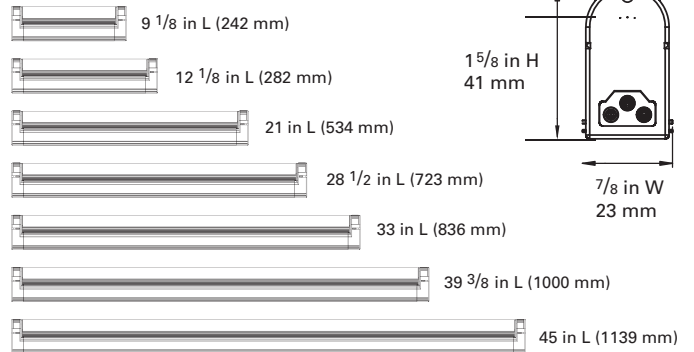

## Installation Diagram

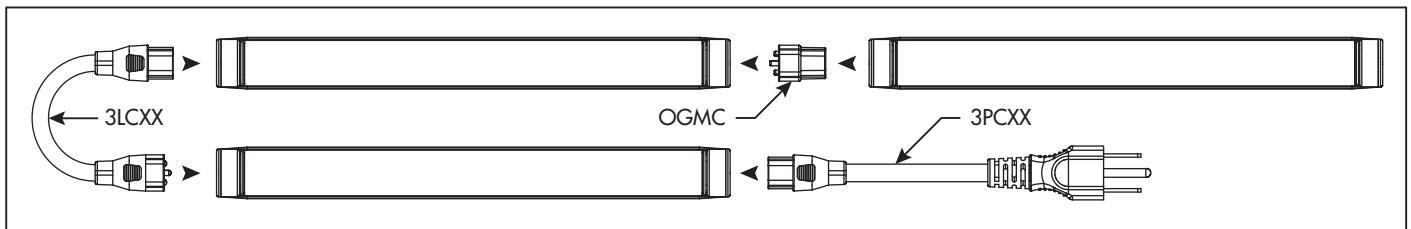

# Galaxy Ultra Slim Series

High Performance Dimmable LED Fixtures

Project Name: \_\_\_\_\_

Catalog No.: \_\_\_\_\_

Date: \_\_\_\_\_

## Ordering Information

Part Number	CCT	System Lumens (lm)	Input Power (W)	Input Current (A)	Input Voltage (V)	Power Factor (PFC)	THD (%)	Length	Width	Height
GLX109P826	2600K	435	6	0.05	120V @ 50/60Hz	≥0.99	<10%	9 1/8" 242mm	7/8" 23mm	1 5/8" 41mm
GLX109P830	3000K	460								
GLX109P840	4000K	480								
GLX109P850	5000K	465								
GLX112P826	2600K	600	8	0.07						
GLX112P830	3000K	630								
GLX112P840	4000K	665								
GLX112P850	5000K	645								
GLX121P826	2600K	1085	13	0.11						
GLX121P830	3000K	1140								
GLX121P840	4000K	1200								
GLX121P850	5000K	1170								
GLX129P826	2600K	1520	18	0.16						
GLX129P830	3000K	1570								
GLX129P840	4000K	1660								
GLX129P850	5000K	1615								
GLX133P826	2600K	1725	21	0.18						
GLX133P830	3000K	1830								
GLX133P840	4000K	1945								
GLX133P850	5000K	1875								
GLX139P826	2600K	2090	25	0.21						
GLX139P830	3000K	2200								
GLX139P840	4000K	2340								
GLX139P850	5000K	2260								
GLX145P826	2600K	2390	29	0.24						
GLX145P830	3000K	2515								
GLX145P840	4000K	2675								
GLX145P850	5000K	2585								

# Galaxy Ultra Slim Series

High Performance Dimmable LED Fixtures

Project Name: \_\_\_\_\_

Catalog No.: \_\_\_\_\_

Date: \_\_\_\_\_

## Ordering Information (Accessories)

### Link Cords

3LC02	2" Inch Link Cord White
3LC06	6" Inch Link Cord White
3LC12	12" Inch Link Cord White
3LC24	24" Inch Link Cord White
3LC36	36" Inch Link Cord White
3LC72	72" Inch Link Cord White
3LC02BLK	2" Inch Link Cord Black
3LC06BLK	6" Inch Link Cord Black
3LC12BLK	12" Inch Link Cord Black
3LC24BLK	24" Inch Link Cord Black
3LC36BLK	36" Inch Link Cord Black
3LC72BLK	72" Inch Link Cord Black
3LC06R	6" Inch Link Cord Right Angle White
3LC12R	12" Inch Link Cord Right Angle White
3LC24R	24" Inch Link Cord Right Angle White
3LC36R	36" Inch Link Cord Right Angle White
3LC72R	72" Inch Link Cord Right Angle White




### Power Cords

3PC3	3' Foot Power Cord White
3PC6	6' Foot Power Cord White
3PC12	12' Foot Power Cord White
3PC6R	6' Foot Power Cord White Right Angle
3PC12R	12' Foot Power Cord White Right Angle
3PC6SW	6' Foot Power Cord w/ Switch White
3PC12SW	12' Foot Power Cord w/ Switch White
3PT18	18" Inch Hard-wire Pigtail White
3PT36	36" Inch Hard-wire Pigtail White
3PC3BLK	3' Foot Power Cord Black
3PC6BLK	6' Foot Power Cord Black
3PC12BLK	12' Foot Power Cord Black
3PC6SWBLK	6' Foot Power Cord w/ Switch Black



### Miscellaneous

JBC1 / JBC1S	Metal Junction Box (4"L x 2"W x 1.5"H)
GLXMBSVH	2 Vertical/Horizontal Mounting Brackets w/ Screws
OGMC	Modular Connector (included with fixture)
OGSW1	Modular On/Off Rocker Switch




JBC1/JBC1S



GLXMBSVH  
Included  
w/Fixture



OGMC  
Included  
w/Fixture



OGSW1