

T4 Odyssey Ultra Slim Series

High Performance Linkable Fluorescent Fixtures

Project Name: _____

Catalog No.: _____

Date: _____

Features




- High-performance energy-efficient built-in electronic ballast
- Fixture-to-fixture linking via link cords or modular connectors
- Plug-and-play installation
- Low energy consumption, high lumen output (650 lm @ 8 Watts)
- Low profile: 7/8" W x 1 5/8" H
- Optional hard wiring cables and junction box
- High color rendering index (CRI) of 85
- 5 Different Lengths
- Lamps available in 5 white color temperatures
- Lamps available in red, green, blue, and ultra-violet



Product Specifications

Housing	Satin Anodized Extruded Aluminum Frame
Ballast	Built-in A.E. Electronic Ballast
Lens Cover	Poly-Vinyl Carbonate Diffuser
Lamp	A.E. T4 Tri-Phosphor Bi-Pin Lamp
Color Temperatures	2700K Warm White 3000K Natural White 3500K Neutral White 4100K Cool White 6400K Day Light
Available Lamp Colors	Red, Blue, Green, Blacklight Blue
Lumens	See Ordering Information Chart
Power Requirement	110-120 VAC
Ground	3-Prong Grounded Wire System
Min. Operating Temp	5°F / -15°C
Max Continuous Link	300 Watts from a single power source
Certification	ETL Listed (U.S. and Canada)

Dimensions



All specifications and technical information are subject to change without notice. We reserve the right to alter, change or withdraw any of our products without notice.



T4 Odyssey Ultra Slim Series

Project Name: _____

Catalog No.: _____

Date: _____

High Performance Linkable Fluorescent Fixtures

Ordering Information

Cat. No	Voltage	Current (mA)	Watt	Length	Width	Height	Lamp Color	Lumens (lm)
OT413LC/27K	110 VAC	120	8	13 1/2"	7/8"	1 5/8"	2700K	650
OT413LC/30K	110 VAC	120	8	13 1/2"	7/8"	1 5/8"	3000K	650
OT413LC/35K	110 VAC	120	8	13 1/2"	7/8"	1 5/8"	3500K	650
OT413LC/41K	110 VAC	120	8	13 1/2"	7/8"	1 5/8"	4100K	650
OT413LC/64K	110 VAC	120	8	13 1/2"	7/8"	1 5/8"	6400K	650
OT413LC/RED	110 VAC	120	8	13 1/2"	7/8"	1 5/8"	RED	650
OT413LC/BLU	110 VAC	120	8	13 1/2"	7/8"	1 5/8"	BLUE	650
OT413LC/GRN	110 VAC	120	8	13 1/2"	7/8"	1 5/8"	GREEN	650
OT413LC/BLK	110 VAC	120	8	13 1/2"	7/8"	1 5/8"	Ultra-Violet	650
OT417LC/27K	110 VAC	170	12	17 1/2"	7/8"	1 5/8"	2700K	940
OT417LC/30K	110 VAC	170	12	17 1/2"	7/8"	1 5/8"	3000K	940
OT417LC/35K	110 VAC	170	12	17 1/2"	7/8"	1 5/8"	3500K	940
OT417LC/41K	110 VAC	170	12	17 1/2"	7/8"	1 5/8"	4100K	940
OT417LC/64K	110 VAC	170	12	17 1/2"	7/8"	1 5/8"	6400K	940
OT417LC/RED	110 VAC	170	12	17 1/2"	7/8"	1 5/8"	RED	940
OT417LC/BLU	110 VAC	170	12	17 1/2"	7/8"	1 5/8"	BLUE	940
OT417LC/GRN	110 VAC	170	12	17 1/2"	7/8"	1 5/8"	GREEN	940
OT417LC/BLK	110 VAC	170	12	17 1/2"	7/8"	1 5/8"	Ultra-Violet	940
OT421LC/27K	110 VAC	280	20	21"	7/8"	1 5/8"	2700K	1450
OT421LC/30K	110 VAC	280	20	21"	7/8"	1 5/8"	3000K	1450
OT421LC/35K	110 VAC	280	20	21"	7/8"	1 5/8"	3500K	1450
OT421LC/41K	110 VAC	280	20	21"	7/8"	1 5/8"	4100K	1450
OT421LC/64K	110 VAC	280	20	21"	7/8"	1 5/8"	6400K	1450
OT421LC/RED	110 VAC	280	20	21"	7/8"	1 5/8"	RED	1450
OT421LC/BLU	110 VAC	280	20	21"	7/8"	1 5/8"	BLUE	1450
OT421LC/GRN	110 VAC	280	20	21"	7/8"	1 5/8"	GREEN	1450
OT421LC/BLK	110 VAC	280	20	21"	7/8"	1 5/8"	Ultra-Violet	1450
OT429LC/27K	110 VAC	300	22	29"	7/8"	1 5/8"	2700K	1850
OT429LC/30K	110 VAC	300	22	29"	7/8"	1 5/8"	3000K	1850
OT429LC/35K	110 VAC	300	22	29"	7/8"	1 5/8"	3500K	1850
OT429LC/41K	110 VAC	300	22	29"	7/8"	1 5/8"	4100K	1850
OT429LC/64K	110 VAC	300	22	29"	7/8"	1 5/8"	6400K	1850
OT429LC/RED	110 VAC	300	22	29"	7/8"	1 5/8"	RED	1850
OT429LC/BLU	110 VAC	300	22	29"	7/8"	1 5/8"	BLUE	1850
OT429LC/GRN	110 VAC	300	22	29"	7/8"	1 5/8"	GREEN	1850
OT429LC/BLK	110 VAC	300	22	29"	7/8"	1 5/8"	Ultra-Violet	1850
OT440LC/27K	110 VAC	345	26	40 1/4"	7/8"	1 5/8"	2700K	2500
OT440LC/30K	110 VAC	345	26	40 1/4"	7/8"	1 5/8"	3000K	2500
OT440LC/35K	110 VAC	345	26	40 1/4"	7/8"	1 5/8"	3500K	2500
OT440LC/41K	110 VAC	345	26	40 1/4"	7/8"	1 5/8"	4100K	2500
OT440LC/64K	110 VAC	345	26	40 1/4"	7/8"	1 5/8"	6400K	2500
OT440LC/RED	110 VAC	345	26	40 1/4"	7/8"	1 5/8"	RED	2500
OT440LC/BLU	110 VAC	345	26	40 1/4"	7/8"	1 5/8"	BLUE	2500
OT440LC/GRN	110 VAC	345	26	40 1/4"	7/8"	1 5/8"	GREEN	2500
OT440LC/BLK	110 VAC	345	26	40 1/4"	7/8"	1 5/8"	Ultra-Violet	2500
OT446LC/27K	110 VAC	425	28	46 1/4"	7/8"	1 5/8"	2700K	2900
OT446LC/30K	110 VAC	425	28	46 1/4"	7/8"	1 5/8"	3000K	2900
OT446LC/35K	110 VAC	425	28	46 1/4"	7/8"	1 5/8"	3500K	2900
OT446LC/41K	110 VAC	425	28	46 1/4"	7/8"	1 5/8"	4100K	2900
OT446LC/64K	110 VAC	425	28	46 1/4"	7/8"	1 5/8"	6400K	2900
OT446LC/RED	110 VAC	425	28	46 1/4"	7/8"	1 5/8"	RED	2900
OT446LC/BLU	110 VAC	425	28	46 1/4"	7/8"	1 5/8"	BLUE	2900
OT446LC/GRN	110 VAC	425	28	46 1/4"	7/8"	1 5/8"	GREEN	2900
OT446LC/BLK	110 VAC	425	28	46 1/4"	7/8"	1 5/8"	Ultra-Violet	2900

Each Odyssey fixture includes T4 Lamp, Lens Cover, Modular Connector (OGMC), and 2 Mounting Brackets w/ Screws (MBS).

Lumen output is based upon 4100K cool white lamps.

Link Odyssey fixtures together utilizing modular connectors (OGMC) or link cords (3LC), sold separately.

WARNING: Maximum link wattage for Odyssey fixtures is not to exceed 300 Watts from one power source.

www.antaeslighting.com

T4 Odyssey Ultra Slim Series

High Performance Linkable Fluorescent Fixtures

Project Name: _____

Catalog No.: _____

Date: _____

Ordering Information (Accessories)

Link Cords

3LC02	2"	Inch Link Cord White
3LC06	6"	Inch Link Cord White
3LC12	12"	Inch Link Cord White
3LC24	24"	Inch Link Cord White
3LC36	36"	Inch Link Cord White
3LC72	72"	Inch Link Cord White
3LC02BLK	2"	Inch Link Cord Black
3LC06BLK	6"	Inch Link Cord Black
3LC12BLK	12"	Inch Link Cord Black
3LC24BLK	24"	Inch Link Cord Black
3LC36BLK	36"	Inch Link Cord Black
3LC72BLK	72"	Inch Link Cord Black
3LC06R	6"	Inch Link Cord Right Angle White
3LC12R	12"	Inch Link Cord Right Angle White
3LC24R	24"	Inch Link Cord Right Angle White
3LC36R	36"	Inch Link Cord Right Angle White
3LC72R	72"	Inch Link Cord Right Angle White





Power Cords

3PC3	3'	Foot Power Cord White
3PC6	6'	Foot Power Cord White
3PC12	12'	Foot Power Cord White
3PC3BLK	3'	Foot Power Cord Black
3PC6BLK	6'	Foot Power Cord Black
3PC12BLK	12'	Foot Power Cord Black
3PC6SW	6'	Foot Power Cord w/ Switch White
3PC12SW	12'	Foot Power Cord w/ Switch White
3PT18	18"	Inch Hard-wire Pigtail White
3PT36	36"	Inch Hard-wire Pigtail White
3PT18BLK	18"	Inch Hard-wire Pigtail Black
3PT36BLK	36"	Inch Hard-wire Pigtail Black





Miscellaneous

JBSC	Junction Box (2.25" x 4" x 1.4" - W x L x H)
MBS	2 Mounting Brackets w/ Screws (included with fixture)
OGMC	Modular Connector (included with fixture)
OGSW1	Modular On/Off Rocker Switch




JBSC

MBS



OGMC

OGSW1

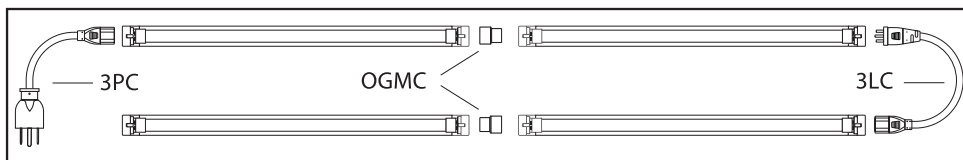

www.antareslighting.com

T4 Odyssey Ultra Slim Series

High Performance Linkable Fluorescent Fixtures

Project Name: _____

Catalog No.: _____

Date: _____

Ordering Information (Replacement Lamps)

Lamps available in box quantities of 6 only.

Cat. No.	Matching Fixture	Watt	Life (Hrs)	Color	Lumens †	CRI	Length	Box Qty.
F8T4/827	OT413LC	8	10,000	2700K	650	85	13"	6
F8T4/830	OT413LC	8	10,000	3000K	650	85	13"	6
F8T4/835	OT413LC	8	10,000	3500K	650	85	13"	6
F8T4/841	OT413LC	8	10,000	4100K	650	85	13"	6
F8T4/864	OT413LC	8	10,000	6400K	650	85	13"	6
F8T4/RED	OT413LC	8	10,000	Red	650	85	13"	6
F8T4/BLU	OT413LC	8	10,000	Blue	650	85	13"	6
F8T4/GRN	OT413LC	8	10,000	Green	650	85	13"	6
F8T4/BLK	OT413LC	8	10,000	Ultra-Violet	650	85	13"	6
F12T4/827	OT417LC	12	10,000	2700K	940	85	17"	6
F12T4/830	OT417LC	12	10,000	3000K	940	85	17"	6
F12T4/835	OT417LC	12	10,000	3500K	940	85	17"	6
F12T4/841	OT417LC	12	10,000	4100K	940	85	17"	6
F12T4/864	OT417LC	12	10,000	6400K	940	85	17"	6
F12T4/RED	OT417LC	12	10,000	Red	940	85	17"	6
F12T4/BLU	OT417LC	12	10,000	Blue	940	85	17"	6
F12T4/GRN	OT417LC	12	10,000	Green	940	85	17"	6
F12T4/BLK	OT417LC	12	10,000	Ultra-Violet	940	85	17"	6
F20T4/827	OT421LC	20	10,000	2700K	1450	85	20 1/2"	6
F20T4/830	OT421LC	20	10,000	3000K	1450	85	20 1/2"	6
F20T4/835	OT421LC	20	10,000	3500K	1450	85	20 1/2"	6
F20T4/841	OT421LC	20	10,000	4100K	1450	85	20 1/2"	6
F20T4/864	OT421LC	20	10,000	6400K	1450	85	20 1/2"	6
F20T4/RED	OT421LC	20	10,000	Red	1450	85	20 1/2"	6
F20T4/BLU	OT421LC	20	10,000	Blue	1450	85	20 1/2"	6
F20T4/GRN	OT421LC	20	10,000	Green	1450	85	20 1/2"	6
F20T4/BLK	OT421LC	20	10,000	Ultra-Violet	1450	85	20 1/2"	6
F22T4/827	OT429LC	22	10,000	2700K	1850	85	28 1/2"	6
F22T4/830	OT429LC	22	10,000	3000K	1850	85	28 1/2"	6
F22T4/835	OT429LC	22	10,000	3500K	1850	85	28 1/2"	6
F22T4/841	OT429LC	22	10,000	4100K	1850	85	28 1/2"	6
F22T4/864	OT429LC	22	10,000	6400K	1850	85	28 1/2"	6
F22T4/RED	OT429LC	22	10,000	Red	1850	85	28 1/2"	6
F22T4/BLU	OT429LC	22	10,000	Blue	1850	85	28 1/2"	6
F22T4/GRN	OT429LC	22	10,000	Green	1850	85	28 1/2"	6
F22T4/BLK	OT429LC	22	10,000	Ultra-Violet	1850	85	28 1/2"	6
F26T4/827	OT440LC	26	10,000	2700K	2500	85	39 3/4"	6
F26T4/830	OT440LC	26	10,000	3000K	2500	85	39 3/4"	6
F26T4/835	OT440LC	26	10,000	3500K	2500	85	39 3/4"	6
F26T4/841	OT440LC	26	10,000	4100K	2500	85	39 3/4"	6
F26T4/864	OT440LC	26	10,000	6400K	2500	85	39 3/4"	6
F26T4/RED	OT440LC	26	10,000	Red	2500	85	39 3/4"	6
F26T4/BLU	OT440LC	26	10,000	Blue	2500	85	39 3/4"	6
F26T4/GRN	OT440LC	26	10,000	Green	2500	85	39 3/4"	6
F26T4/BLK	OT440LC	26	10,000	Ultra-Violet	2500	85	39 3/4"	6
F28T4/827	OT446LC	28	10,000	2700K	2900	85	45 3/4"	6
F28T4/830	OT446LC	28	10,000	3000K	2900	85	45 3/4"	6
F28T4/835	OT446LC	28	10,000	3500K	2900	85	45 3/4"	6
F28T4/841	OT446LC	28	10,000	4100K	2900	85	45 3/4"	6
F28T4/864	OT446LC	28	10,000	6400K	2900	85	45 3/4"	6
F28T4/RED	OT446LC	28	10,000	Red	2900	85	45 3/4"	6
F28T4/BLU	OT446LC	28	10,000	Blue	2900	85	45 3/4"	6
F28T4/GRN	OT446LC	28	10,000	Green	2900	85	45 3/4"	6
F28T4/BLK	OT446LC	28	10,000	Ultra-Violet	2900	85	45 3/4"	6

† Lumens are based upon a 4100K color temperature.

All lamps MUST be ordered in box quantities of 6 to prevent damage during transit.

www.antareshlighting.com