

T5 Geminix Ultra Slim Series

High Performance Linkable Fluorescent Fixtures

Project Name: _____

Catalog No.: _____

Date: _____

Features



- High-performance energy-efficient built-in electronic ballast
- Fixture-to-fixture linking via link cords or modular connectors
- Plug-and-play installation
- Linkable for continuous lighting (**300W Max**)
- Low energy consumption, high lumen output (450 lm @ 8 Watts)
- Low profile: 7/8" W x 1 5/8" H
- Optional hard wiring cables and junction box
- High color rendering index (CRI) of 82
- 10 different Lengths from 9 3/8" - 58"
- 6 Standard / 4 Non-Standard New Lengths
- Lamps available in 5 white color temperatures
- Lamps available in red, green, blue, and blacklight blue



Product Specifications

Housing	Satin Anodized Extruded Aluminum Frame
Ballast	Built-in A.E. Electronic Ballast
Lens Cover	Poly-Vinyl Carbonate Diffuser
Lamp	T5 Tri-Phosphor Bi-Pin Lamp
Color Temperatures	2700K Warm White 3000K Warm White 3500K Neutral White 4100K Cool White 6400K Day Light
Available Lamp Colors	Red, Blue, Green, Blacklight Blue
Lumens	See Information Chart
Power Requirement	120V AC 240V AC (Special Order)
Ground	3-Prong Grounded Wire System
Min. Operating Temp	5° F / -15° C
Max Continuous Link	300 Watts from a single power source
Certification	ETL Listed (U.S. and Canada)
Warranty	2 Years (Excludes Lamp)

Dimensions

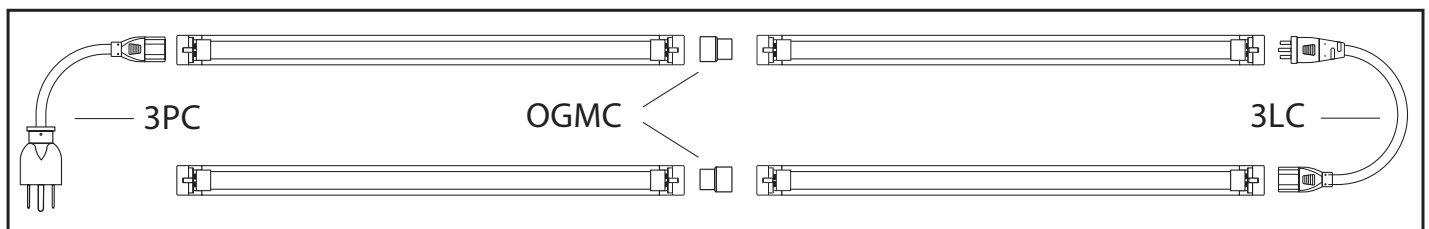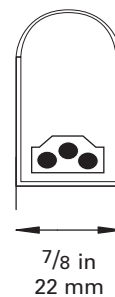

All design and specifications are subject to change without notice.

Ordering Information

Standard T5 Geminix Ultra Slim Series

Cat. No.	Voltage	Input Amp	Watt	Length	Width	Height	Lamp Color	Lumens (lm)
GT509LC/27K	120V AC	.10	6	9 3/8"	7/8"	15/8"	2700K	320
GT509LC/30K	120V AC	.10	6	9 3/8"	7/8"	15/8"	3000K	320
GT509LC/35K	120V AC	.10	6	9 3/8"	7/8"	15/8"	3500K	320
GT509LC/41K	120V AC	.10	6	9 3/8"	7/8"	15/8"	4100K	320
GT509LC/64K	120V AC	.10	6	9 3/8"	7/8"	15/8"	6400K	320
GT509LC/RED	120V AC	.10	6	9 3/8"	7/8"	15/8"	Red	320
GT509LC/BLU	120V AC	.10	6	9 3/8"	7/8"	15/8"	Blue	320
GT509LC/GRN	120V AC	.10	6	9 3/8"	7/8"	15/8"	Green	320
GT509LC/BLK	120V AC	.10	6	9 3/8"	7/8"	15/8"	Blacklight Blue	320
GT512LC/27K	120V AC	.13	8	12 3/8"	7/8"	15/8"	2700K	450
GT512LC/30K	120V AC	.13	8	12 3/8"	7/8"	15/8"	3000K	450
GT512LC/35K	120V AC	.13	8	12 3/8"	7/8"	15/8"	3500K	450
GT512LC/41K	120V AC	.13	8	12 3/8"	7/8"	15/8"	4100K	450
GT512LC/64K	120V AC	.13	8	12 3/8"	7/8"	15/8"	6400K	450
GT512LC/RED	120V AC	.13	8	12 3/8"	7/8"	15/8"	Red	450
GT512LC/BLU	120V AC	.13	8	12 3/8"	7/8"	15/8"	Blue	450
GT512LC/GRN	120V AC	.13	8	12 3/8"	7/8"	15/8"	Green	450
GT512LC/BLK	120V AC	.13	8	12 3/8"	7/8"	15/8"	Blacklight Blue	450
GT522LC/27K	120V AC	.21	14	22 5/8"	7/8"	15/8"	2700K	1350
GT522LC/30K	120V AC	.21	14	22 5/8"	7/8"	15/8"	3000K	1350
GT522LC/35K	120V AC	.21	14	22 5/8"	7/8"	15/8"	3500K	1350
GT522LC/41K	120V AC	.21	14	22 5/8"	7/8"	15/8"	4100K	1350
GT522LC/64K	120V AC	.21	14	22 5/8"	7/8"	15/8"	6400K	1350
GT522LC/RED	120V AC	.21	14	22 5/8"	7/8"	15/8"	Red	1350
GT522LC/BLU	120V AC	.21	14	22 5/8"	7/8"	15/8"	Blue	1350
GT522LC/GRN	120V AC	.21	14	22 5/8"	7/8"	15/8"	Green	1350
GT522LC/BLK	120V AC	.21	14	22 5/8"	7/8"	15/8"	Blacklight Blue	1350
GT534LC/27K	120V AC	.34	21	34 1/2"	7/8"	15/8"	2700K	2100
GT534LC/30K	120V AC	.34	21	34 1/2"	7/8"	15/8"	3000K	2100
GT534LC/35K	120V AC	.34	21	34 1/2"	7/8"	15/8"	3500K	2100
GT534LC/41K	120V AC	.34	21	34 1/2"	7/8"	15/8"	4100K	2100
GT534LC/64K	120V AC	.34	21	34 1/2"	7/8"	15/8"	6400K	2100
GT534LC/RED	120V AC	.34	21	34 1/2"	7/8"	15/8"	Red	2100
GT534LC/BLU	120V AC	.34	21	34 1/2"	7/8"	15/8"	Blue	2100
GT534LC/GRN	120V AC	.34	21	34 1/2"	7/8"	15/8"	Green	2100
GT534LC/BLK	120V AC	.34	21	34 1/2"	7/8"	15/8"	Blacklight Blue	2100
GT546LC/27K	120V AC	.43	28	46 1/4"	7/8"	15/8"	2700K	2900
GT546LC/30K	120V AC	.43	28	46 1/4"	7/8"	15/8"	3000K	2900
GT546LC/35K	120V AC	.43	28	46 1/4"	7/8"	15/8"	3500K	2900
GT546LC/41K	120V AC	.43	28	46 1/4"	7/8"	15/8"	4100K	2900
GT546LC/64K	120V AC	.43	28	46 1/4"	7/8"	15/8"	6400K	2900
GT546LC/RED	120V AC	.43	28	46 1/4"	7/8"	15/8"	Red	2900
GT546LC/BLU	120V AC	.43	28	46 1/4"	7/8"	15/8"	Blue	2900
GT546LC/GRN	120V AC	.43	28	46 1/4"	7/8"	15/8"	Green	2900
GT546LC/BLK	120V AC	.43	28	46 1/4"	7/8"	15/8"	Blacklight Blue	2900
GT559LC/27K†	120V AC	.55	35	58"	7/8"	15/8"	2700K	3650
GT559LC/30K†	120V AC	.55	35	58"	7/8"	15/8"	3000K	3650
GT559LC/35K†	120V AC	.55	35	58"	7/8"	15/8"	3500K	3650
GT559LC/41K†	120V AC	.55	35	58"	7/8"	15/8"	4100K	3650
GT559LC/64K†	120V AC	.55	35	58"	7/8"	15/8"	6400K	3650
GT559LC/RED†	120V AC	.55	35	58"	7/8"	15/8"	Red	3650
GT559LC/BLU†	120V AC	.55	35	58"	7/8"	15/8"	Blue	3650
GT559LC/GRN†	120V AC	.55	35	58"	7/8"	15/8"	Green	3650
GT559LC/BLK†	120V AC	.55	35	58"	7/8"	15/8"	Blacklight Blue	3650

†All GT559LC fixtures require a minimum quantity of 6 pieces per order.

Each Geminix fixture includes T5 Lamp, Lens Cover, Modular Connector (OGMC), and 2 Mounting Brackets w/ Screws (MBS). Lumen output is based upon 4100K cool white lamps.

Link Geminix fixtures together utilizing Modular Connectors (OGMC Included) and Link Cords (3LC sold separately).

WARNING: Maximum link wattage for Geminix fixtures is not to exceed **300W** from one power source.

T5 Geminix Ultra Slim Series

High Performance Linkable Fluorescent Fixtures

Project Name: _____

Catalog No.: _____

Date: _____

Ordering Information - (New T5 Lengths)

Non-Standard

Cat. No.	Voltage	Input Amp	Watt	Length	Width	Height	Lamp Color	Lumens (lm)
GT517LC/30K	120V AC	0.22	11	17 1/2"	7/8"	1 5/8"	3000K	950
GT517LC/35K	120V AC	0.22	11	17 1/2"	7/8"	1 5/8"	3500K	950
GT517LC/41K	120V AC	0.22	11	17 1/2"	7/8"	1 5/8"	4100K	950
GT517LC/64K	120V AC	0.22	11	17 1/2"	7/8"	1 5/8"	6400K	950
GT521LC/30K	120V AC	0.26	13	21"	7/8"	1 5/8"	3000K	1150
GT521LC/35K	120V AC	0.26	13	21"	7/8"	1 5/8"	3500K	1150
GT521LC/41K	120V AC	0.26	13	21"	7/8"	1 5/8"	4100K	1150
GT521LC/64K	120V AC	0.26	13	21"	7/8"	1 5/8"	6400K	1150
GT529LC/30K	120V AC	0.31	18	29"	7/8"	1 5/8"	3000K	1700
GT529LC/35K	120V AC	0.31	18	29"	7/8"	1 5/8"	3500K	1700
GT529LC/41K	120V AC	0.31	18	29"	7/8"	1 5/8"	4100K	1700
GT529LC/64K	120V AC	0.31	18	29"	7/8"	1 5/8"	6400K	1700
GT540LC/30K	120V AC	0.43	24	40 1/4"	7/8"	1 5/8"	3000K	2400
GT540LC/35K	120V AC	0.43	24	40 1/4"	7/8"	1 5/8"	3500K	2400
GT540LC/41K	120V AC	0.43	24	40 1/4"	7/8"	1 5/8"	4100K	2400
GT540LC/64K	120V AC	0.43	24	40 1/4"	7/8"	1 5/8"	6400K	2400

Ordering Information - (New T5 Lamps)

Non-Standard

Cat. No.	Matching Fixture	Watt	Life (Hrs)	Color	Lumens†	CRI	Length	Box Qty.
F11T5/830	GT517LC/30K	11	15,000	3000K	950	82	17"	6
F11T5/835	GT517LC/35K	11	15,000	3500K	950	82	17"	6
F11T5/841	GT517LC/41K	11	15,000	4100K	950	82	17"	6
F11T5/864	GT517LC/64K	11	15,000	6400K	950	82	17"	6
F13T5/830	GT521LC/30K	13	15,000	3000K	1150	82	20 1/2"	6
F13T5/835	GT521LC/35K	13	15,000	3500K	1150	82	20 1/2"	6
F13T5/841	GT521LC/41K	13	15,000	4100K	1150	82	20 1/2"	6
F13T5/864	GT521LC/64K	13	15,000	6400K	1150	82	20 1/2"	6
F18T5/830	GT529LC/30K	18	15,000	3000K	1700	82	28 1/2"	6
F18T5/835	GT529LC/35K	18	15,000	3500K	1700	82	28 1/2"	6
F18T5/841	GT529LC/41K	18	15,000	4100K	1700	82	28 1/2"	6
F18T5/864	GT529LC/64K	18	15,000	6400K	1700	82	28 1/2"	6
F24T5/830	GT540LC/30K	24	15,000	3000K	2400	82	39 3/4"	6
F24T5/835	GT540LC/35K	24	15,000	3500K	2400	82	39 3/4"	6
F24T5/841	GT540LC/41K	24	15,000	4100K	2400	82	39 3/4"	6
F24T5/864	GT540LC/64K	24	15,000	6400K	2400	82	39 3/4"	6

Each Geminix fixture includes T5 Lamp, Lens Cover, Modular Connector (OGMC), and 2 Mounting Brackets w/ Screws (MBS).

Lumen output is based upon 4100K cool white lamps.

Link Geminix fixtures together utilizing Modular Connectors (OGMC Included) and Link Cords (3LC sold separately).

WARNING: Maximum link wattage for Geminix fixtures is not to exceed **300W** from one power source.

Cat. No.	Matching Fixture	Watt	Life (Hrs)	Color	Lumens†	CRI	Length	Box Qty.
F6T5/827	GT509LC	6	15,000	2700K	320	82	8 7/8"	6
F6T5/830	GT509LC	6	15,000	3000K	320	82	8 7/8"	6
F6T5/835	GT509LC	6	15,000	3500K	320	82	8 7/8"	6
F6T5/841	GT509LC	6	15,000	4100K	320	82	8 7/8"	6
F6T5/864	GT509LC	6	15,000	6400K	320	82	8 7/8"	6
F6T5/8RED	GT509LC	6	15,000	Red	320	82	8 7/8"	6
F6T5/8BLU	GT509LC	6	15,000	Blue	320	82	8 7/8"	6
F6T5/8GRN	GT509LC	6	15,000	Green	320	82	8 7/8"	6
F6T5/8BLK	GT509LC	6	15,000	Blacklight Blue	320	82	8 7/8"	6
F8T5/827	GT512LC	8	15,000	2700K	450	82	11 7/8"	6
F8T5/830	GT512LC	8	15,000	3000K	450	82	11 7/8"	6
F8T5/835	GT512LC	8	15,000	3500K	450	82	11 7/8"	6
F8T5/841	GT512LC	8	15,000	4100K	450	82	11 7/8"	6
F8T5/864	GT512LC	8	15,000	6400K	450	82	11 7/8"	6
F8T5/RED	GT512LC	8	15,000	Red	450	82	11 7/8"	6
F8T5/BLU	GT512LC	8	15,000	Blue	450	82	11 7/8"	6
F8T5/GRN	GT512LC	8	15,000	Green	450	82	11 7/8"	6
F8T5/BLK	GT512LC	8	15,000	Blacklight Blue	450	82	11 7/8"	6
F14T5/827	GT522LC	14	15,000	2700K	1350	82	22 1/8"	6
F14T5/830	GT522LC	14	15,000	3000K	1350	82	22 1/8"	6
F14T5/835	GT522LC	14	15,000	3500K	1350	82	22 1/8"	6
F14T5/841	GT522LC	14	15,000	4100K	1350	82	22 1/8"	6
F14T5/864	GT522LC	14	15,000	6400K	1350	82	22 1/8"	6
F14T5/RED	GT522LC	14	15,000	Red	1350	82	22 1/8"	6
F14T5/BLU	GT522LC	14	15,000	Blue	1350	82	22 1/8"	6
F14T5/GRN	GT522LC	14	15,000	Green	1350	82	22 1/8"	6
F14T5/BLK	GT522LC	14	15,000	Blacklight Blue	1350	82	22 1/8"	6
F21T5/827	GT534LC	21	15,000	2700K	2100	82	34"	6
F21T5/830	GT534LC	21	15,000	3000K	2100	82	34"	6
F21T5/835	GT534LC	21	15,000	3500K	2100	82	34"	6
F21T5/841	GT534LC	21	15,000	4100K	2100	82	34"	6
F21T5/864	GT534LC	21	15,000	6400K	2100	82	34"	6
F21T5/RED	GT534LC	21	15,000	Red	2100	82	34"	6
F21T5/BLU	GT534LC	21	15,000	Blue	2100	82	34"	6
F21T5/GRN	GT534LC	21	15,000	Green	2100	82	34"	6
F21T5/BLK	GT534LC	21	15,000	Blacklight Blue	2100	82	34"	6
F28T5/827	GT546LC	28	15,000	2700K	2900	82	45 3/4"	6
F28T5/830	GT546LC	28	15,000	3000K	2900	82	45 3/4"	6
F28T5/835	GT546LC	28	15,000	3500K	2900	82	45 3/4"	6
F28T5/841	GT546LC	28	15,000	4100K	2900	82	45 3/4"	6
F28T5/864	GT546LC	28	15,000	6400K	2900	82	45 3/4"	6
F28T5/RED	GT546LC	28	15,000	Red	2900	82	45 3/4"	6
F28T5/BLU	GT546LC	28	15,000	Blue	2900	82	45 3/4"	6
F28T5/GRN	GT546LC	28	15,000	Green	2900	82	45 3/4"	6
F28T5/BLK	GT546LC	28	15,000	Blacklight Blue	2900	82	45 3/4"	6
F35T5/827	GT559LC	35	15,000	2700K	3650	82	57 1/2"	6
F35T5/830	GT559LC	35	15,000	3000K	3650	82	57 1/2"	6
F35T5/835	GT559LC	35	15,000	3500K	3650	82	57 1/2"	6
F35T5/841	GT559LC	35	15,000	4100K	3650	82	57 1/2"	6
F35T5/864	GT559LC	35	15,000	6400K	3650	82	57 1/2"	6
F35T5/RED	GT559LC	35	15,000	Red	3650	82	57 1/2"	6
F35T5/BLU	GT559LC	35	15,000	Blue	3650	82	57 1/2"	6
F35T5/GRN	GT559LC	35	15,000	Green	3650	82	57 1/2"	6
F35T5/BLK	GT559LC	35	15,000	Blacklight Blue	3650	82	57 1/2"	6

† Lumens are based upon a 4100K color temperature.
All lamps MUST be ordered in box quantities of 6 to prevent damage during transit.

Lamps available in box quantities of 6 only.

T5 Geminix Ultra Slim Series

High Performance Linkable Fluorescent Fixtures

Project Name: _____

Catalog No.: _____

Date: _____

Ordering Information (Accessories)


Link Cords

3LC02	2" Inch Link Cord White
3LC06	6" Inch Link Cord White
3LC12	12" Inch Link Cord White
3LC24	24" Inch Link Cord White
3LC36	36" Inch Link Cord White
3LC72	72" Inch Link Cord White
3LC02BLK	2" Inch Link Cord Black
3LC06BLK	6" Inch Link Cord Black
3LC12BLK	12" Inch Link Cord Black
3LC24BLK	24" Inch Link Cord Black
3LC36BLK	36" Inch Link Cord Black
3LC72BLK	72" Inch Link Cord Black
3LC06R	6" Inch Link Cord Right Angle White
3LC12R	12" Inch Link Cord Right Angle White
3LC24R	24" Inch Link Cord Right Angle White
3LC36R	36" Inch Link Cord Right Angle White
3LC72R	72" Inch Link Cord Right Angle White




Power Cords

3PC3	3' Foot Power Cord White
3PC6	6' Foot Power Cord White
3PC12	12' Foot Power Cord White
3PC6R	6' Foot Power Cord White Right Angle
3PC12R	12' Foot Power Cord White Right Angle
3PC6SW	6' Foot Power Cord w/ Switch White
3PC12SW	12' Foot Power Cord w/ Switch White
3PT18	18" Inch Hard-wire Pigtail White
3PT36	36" Inch Hard-wire Pigtail White
3PC3BLK	3' Foot Power Cord Black
3PC6BLK	6' Foot Power Cord Black
3PC12BLK	12' Foot Power Cord Black
3PC6SWBLK	6' Foot Power Cord w/ Switch Black




Miscellaneous


JBSC	Junction Box (2.25" x 4" x 1.4" - W x L x H)
MBS	2 Mounting Brackets w/ Screws (included with fixture)
OGMC	Modular Connector (included with fixture)
OGSW1	Modular On/Off Rocker Switch




JBSC



MBS
Included
w/Fixture



OGMC
Included
w/Fixture



OGSW1